


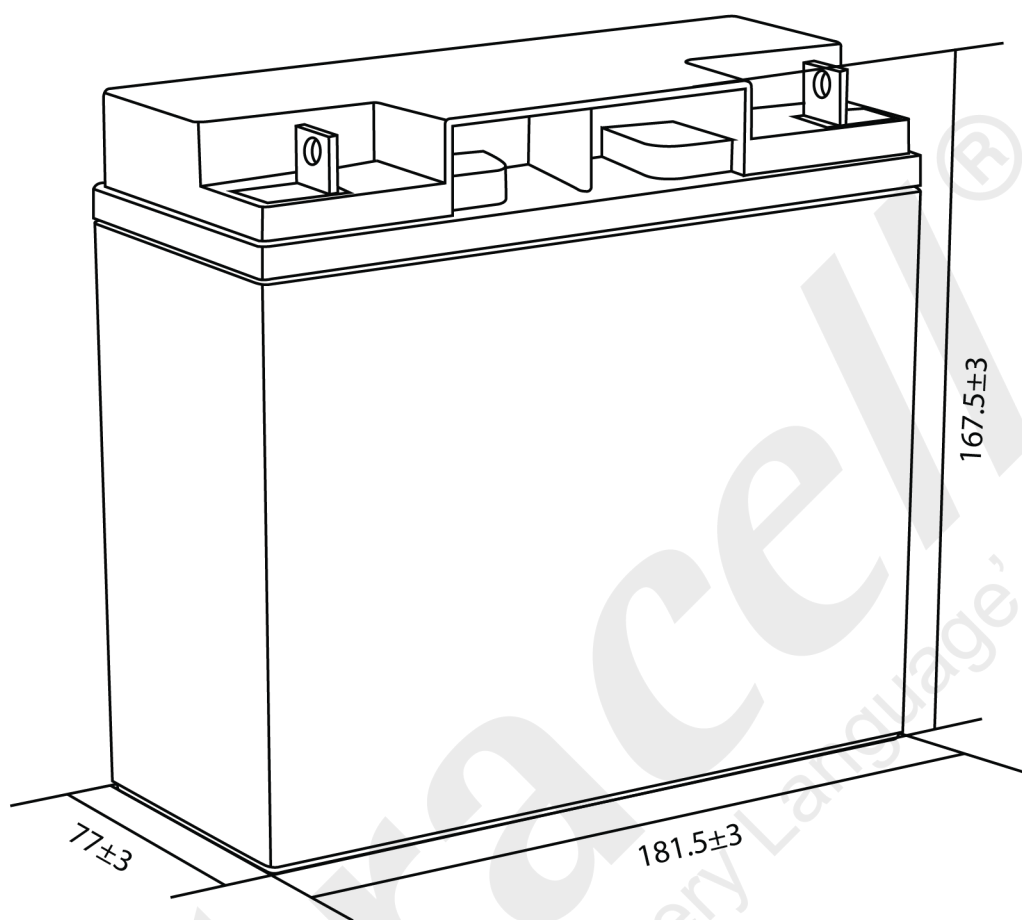


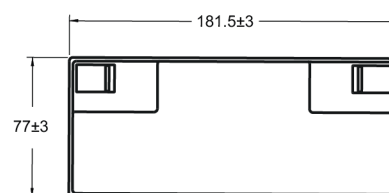

Technical Dimensions (mm)

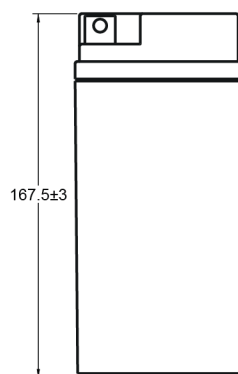


Image

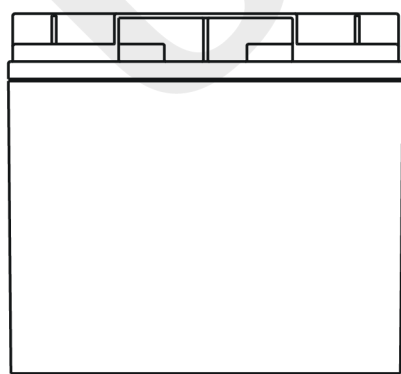


Terminal Dimensions (mm)

Standard Terminal: F3



Optional Terminal: F12



Technical Specification

Output	Nominal Voltage Nominal Capacity (20HR)	12V 18Ah
Terminal Type	Standard Terminal Optional Terminal	F3 F12
Container Material	Standard Option Flame Retardant Option (FR)	ABS ABS (UL94:VO)
Rated Capacity	(20HR 1.75V/cell, 25°C) (10HR 1.75V/cell, 25°C) (5HR 1.75V/cell, 25°C) (3HR 1.75V/cell, 25°C) (1HR 1.60V/cell, 25°C)	18.00 Ah/0.900A 17.10 Ah/1.71A 15.80 Ah/3.16A 14.52 Ah/4.84A 12.10 Ah/12.1A
Max Discharge Current	270A (5s)	
Internal Resistance	Approx 16mΩ	
Discharge Characteristics	Operating Temp Range	Discharge: -15 ~ 50°C Charge: 0 ~ 40°C Storage: -15 ~ 40°C
	Nominal Operating Temp Range	25 ± 3°C
	Cycle Use	Initial Charging Current less than 5.4A. Voltage 14.4V ~ 15.0V @ 25°C Temp. Coefficient -30mV/°C
	Standby Use	No limit on initial charging current. Voltage 13.5V ~ 13.8V @ 25°C Temp. Coefficient -20mV/°C
	Capacity affected by Temperature	40°C 103% 25°C 100% 0°C 86%
Design Floating Life at 20°C	12 Years	

Self Discharge

Ultracell® UXL batteries may be stored for up to 6 months at 25°C and then a refresh charge is required. For higher temperatures the time intervals will be shorter.


Constant Current Discharge / Constant Power Discharge At 25°C (Amperes & Watts/Cell)

A = Amperes W = Watts


F.V/TIME	10 min	15 min	20 min	30 min	45 min	60 min	2 hours	3 hours	4 hours	5 hours	6 hours	8 hours	10 hours	20 hours
A	W													
1.85V/cell	36.0	29.0	24.3	18.3	13.6	11.1	6.43	4.70	3.70	3.08	2.64	2.07	1.67	0.882
	68.8	55.6	46.8	35.3	26.3	21.6	12.6	9.23	7.30	6.09	5.22	4.11	3.31	1.76
1.80V/cell	37.8	30.1	25.1	18.7	13.8	11.3	6.53	4.77	3.76	3.12	2.67	2.10	1.69	0.891
	71.9	57.5	48.0	36.0	26.7	21.9	12.7	9.35	7.39	6.16	5.28	4.16	3.35	1.78
1.75V/cell	39.6	31.2	25.8	19.2	14.1	11.5	6.63	4.84	3.81	3.16	2.70	2.12	1.71	0.900
	75.0	59.3	49.2	36.7	27.2	22.2	12.9	9.47	7.48	6.23	5.34	4.20	3.39	1.80
1.70V/cell	41.5	32.3	26.6	19.6	14.4	11.7	6.73	4.91	3.86	3.21	2.74	2.15	1.73	0.910
	78.1	61.1	50.4	37.4	27.6	22.5	13.1	9.59	7.57	6.30	5.40	4.25	3.43	1.82
1.65V/cell	42.6	33.0	27.0	19.9	14.5	11.8	6.80	4.95	3.89	3.23	2.76	2.17	1.74	0.915
	79.9	62.2	51.2	37.8	27.8	22.7	13.2	9.66	7.62	6.34	5.44	4.28	3.45	1.83
1.60V/cell	45.2	34.5	28.1	20.5	14.9	12.1	6.93	5.05	3.97	3.29	2.81	2.20	1.77	0.928
	84.1	64.5	52.8	38.8	28.4	23.1	13.4	9.82	7.74	6.44	5.52	4.34	3.50	1.86




Discharge Characteristics

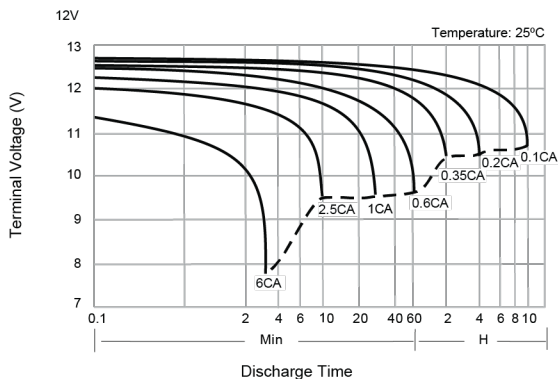

Charging Characteristics

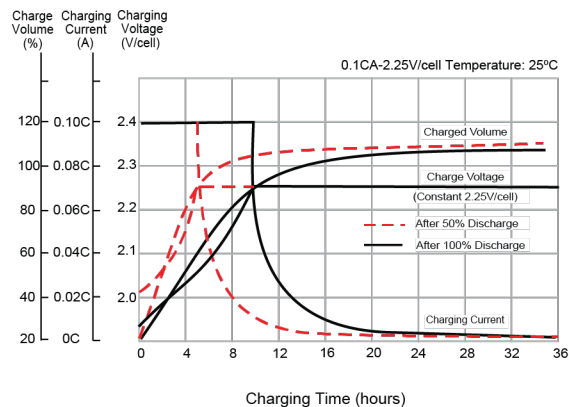

Temperature Effects in Relation to Battery Capacity

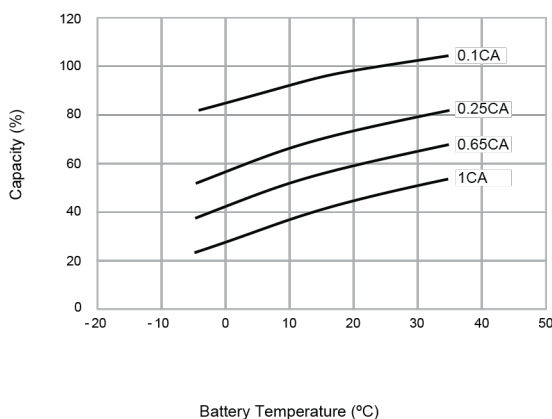

Effect of Temperature on Long Term Float Life

