


Ultracell®

'Quality in Every Language'




UHR100-12

12V 100Ah / 12V 356.1Wh

High Rated UPS Series

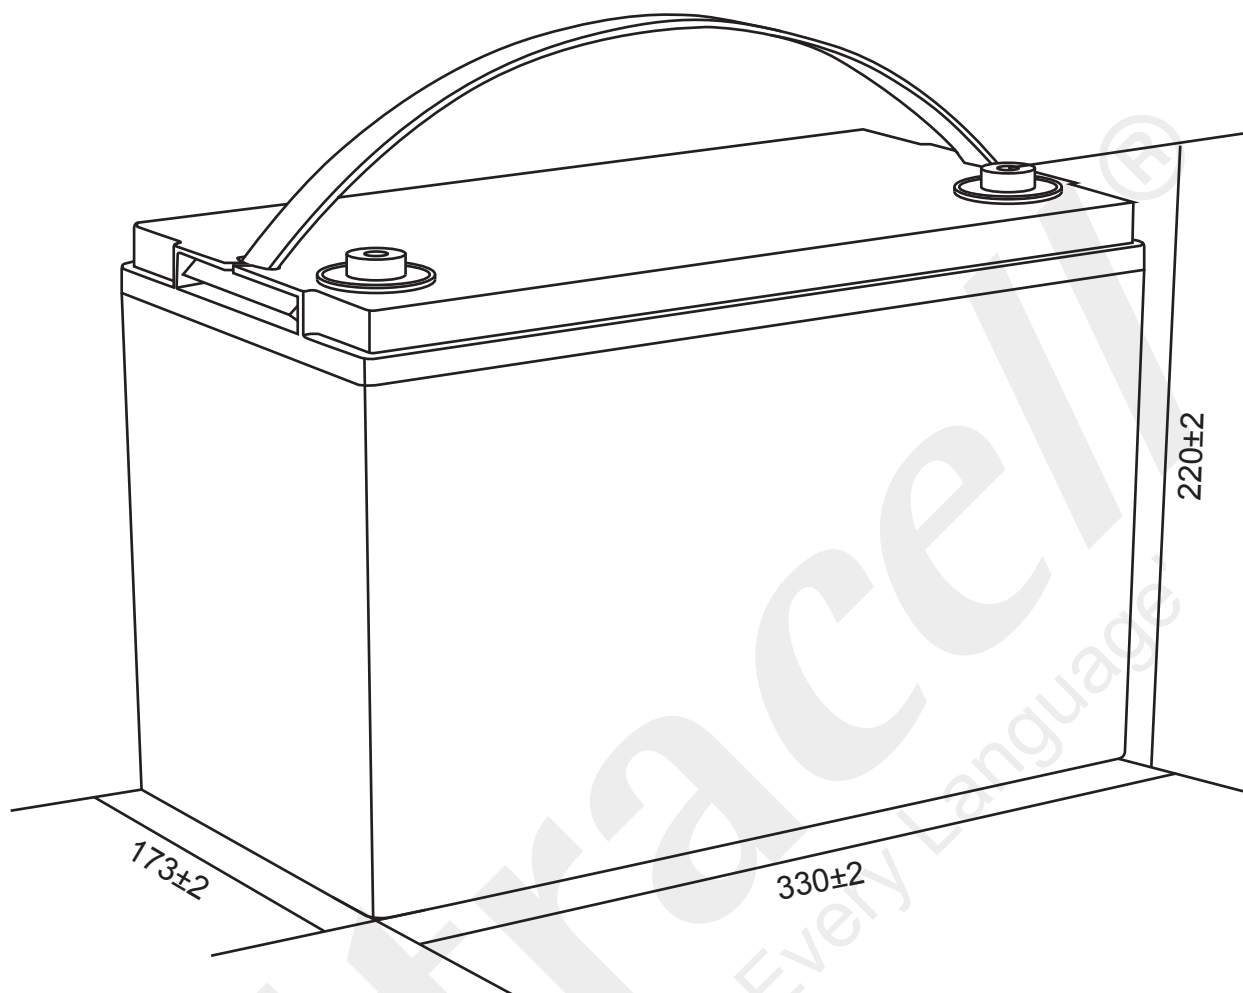

Technical Dimensions (mm)

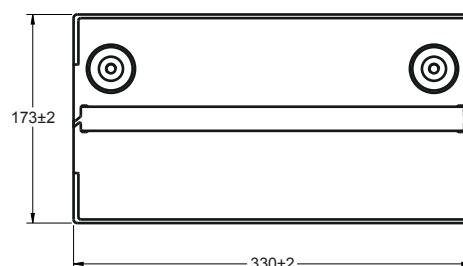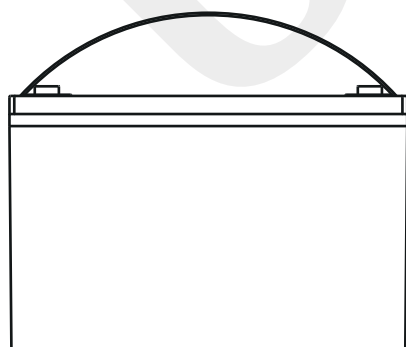


Image



Terminal Dimensions (mm)

Standard Terminal: F11



Technical Specification

Output	Nominal Voltage	12V
	Watts @ 15min, 1.67V/Cell	356.1W
Terminal Type	Standard Terminal	F11
Container Material	Standard Option	ABS
	Flame Retardant Option (FR)	ABS (UL94:VO)
Rated Capacity	(10HR 1.80V/cell, 25°C)	104.0 Ah/10.4A
	(8HR 1.80V/cell, 25°C)	100 Ah/12.5A
	(5HR 1.75V/cell, 25°C)	89.5 Ah/17.9A
	(3HR 1.75V/cell, 25°C)	78.8 Ah/26.6A
	(1HR 1.60V/cell, 25°C)	68.2 Ah/68.2A
Max Discharge Current	1200A (5s)	
Internal Resistance	Approx 4.9mΩ	
Discharge Characteristics	Operating Temp Range	Discharge: -15 ~ 50°C Charge: 0 ~ 40°C Storage: -15 ~ 40°C
	Nominal Operating Temp Range	25 ± 3°C
	Cycle Use	Initial Charging Current less than 30A. Voltage 14.4V ~ 15.0V @ 25°C Temp. Coefficient -30mV/°C
	Standby Use	No limit on initial charging current. Voltage 13.5V ~ 13.8V @ 25°C Temp. Coefficient -20mV/°C
	Capacity affected by Temperature	40°C 103% 25°C 100% 0°C 86%
Design Floating Life at 20°C	12 Years	

Self Discharge


Ultracell® UHR batteries may be stored for up to 6 months at 25°C and then a refresh charge is required. For higher temperatures the time intervals will be shorter.

Constant Current Discharge / Constant Power Discharge At 25°C (Amperes & Watts/Cell)


A = Amperes W = Watts

F.V/TIME	5	10	15	20	30	45	60	2	3	4	5	6	8	10	20
A W	min	min	min	min	min	min	min	hours	hours	hours	hours	hours	hours	hours	hours
1.85V/cell	193.2	156.0	138.8	118.5	89.2	67.9	56.9	33.4	24.3	19.5	16.5	14.6	12.0	10.0	5.16
	364.4	295.6	268.3	230.8	174.9	133.9	112.8	66.4	48.6	39.1	33.2	29.4	24.2	20.3	10.5
1.80V/cell	235.1	185.1	155.2	128.4	95.8	71.7	60.4	35.6	25.8	20.6	17.5	15.4	12.5	10.4	5.34
	439.5	348.1	298.1	248.7	187.0	140.8	119.2	70.5	51.4	41.3	35.0	30.9	25.2	21.0	10.8
1.75V/cell	272.4	204.3	168.0	136.8	99.8	75.3	62.0	36.5	26.6	21.1	17.9	15.7	12.7	10.5	5.39
	504.4	381.4	320.7	263.8	194.0	147.4	122.1	72.1	52.7	42.0	35.7	31.3	25.4	21.1	10.9
1.70V/cell	302.6	216.5	179.6	142.8	102.8	78.1	64.0	37.1	27.0	21.5	18.2	15.8	12.7	10.6	5.44
	555.3	401.0	340.7	273.9	199.0	152.4	125.6	73.2	53.5	42.7	36.3	31.6	25.5	21.2	10.9
1.67V/cell	318.9	231.0	189.4	149.1	106.4	80.5	66.0	37.9	27.4	22.0	18.5	16.1	12.9	10.7	5.49
	579.2	423.7	356.1	283.9	204.8	156.4	129.0	74.4	54.0	43.5	36.8	32.1	25.7	21.4	11.0
1.60V/cell	341.6	244.0	198.8	156.0	110.6	82.3	68.2	38.5	27.9	22.3	18.8	16.3	13.0	10.8	5.54
	612.4	442.9	370.6	294.5	211.2	158.8	132.7	75.3	54.9	44.0	37.2	32.4	25.9	21.5	11.1


Discharge Characteristics

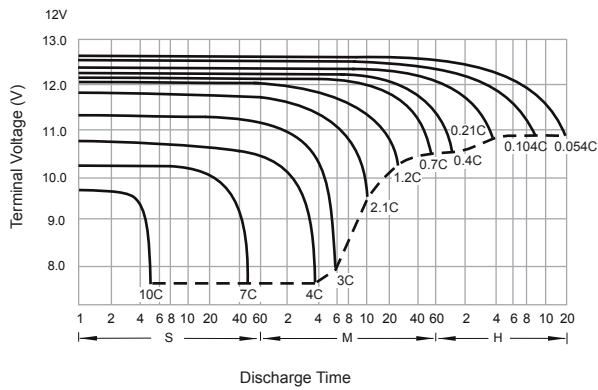


Float Charging Characteristics

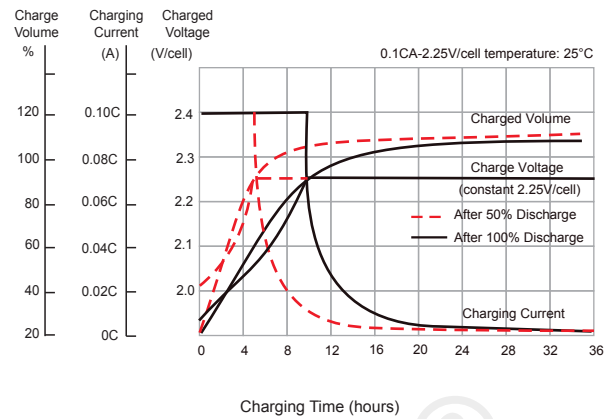


Temperature Effects in Relation to Battery Capacity

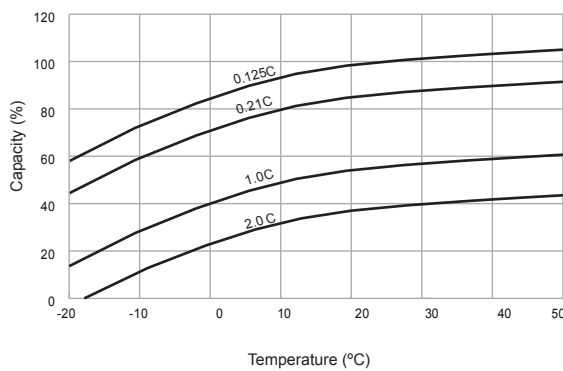

Effect of Temperature on Long Term Float Life

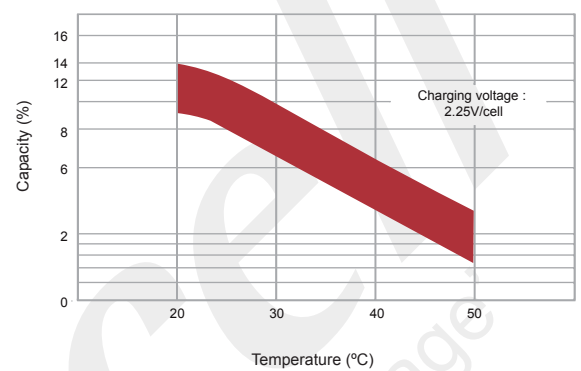

General Relation of Capacity vs. Storage Time

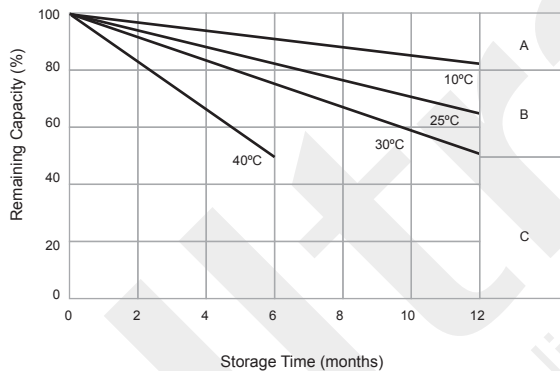

General Relation of Capacity vs. Storage Time (Notes)

- A) No supplementary charge required.
(Carryout supplementary charge before use if 100% capacity is required.)
- B) Supplementary charge required before use. Optional charging way as below:
 1. Charged for above 3 days at limited current 0.25CA and constant voltage 2.25V/cell.
 2. Charged for above 20 hours at limited current 0.25CA and constant voltage 2.45V/cell.
 3. Charged for 8 ~ 10 hours at limited current 0.05 CA.
- C) Supplementary charge may often fail to recover the capacity.
The battery should never be left standing till this is reached.